


NEW

Exton Monopoint System


Kore-EX5 IP65 Monopoint
Direct Mount with "S" Envelope



Category:	Exton Direct Mount Monopoint with S Envelope can be used for Exterior or Interior applications. Designed for use with a remote Power Supply Enclosure with Driver. Optional 0-10V Dimming.
Material:	Monopoint: Powdercoated or anodized aluminum. Kore-EX5 LED Module: UV stable exterior anodized aluminum, UV stable polycarbonate, glass lenses, O-rings. Envelope: Hand blown, tooled glass. Note: Tegan's Glass Envelopes are hand blown with tooling. While the tooling provides consistency in scale, the Envelopes will have minor variations from Envelope-to-Envelope and batch-to-batch in scale and appearance. There also can be minor bubbles (clear/frosted versions) and tool marks on the surface. These are all common attributes of blown glass.
Finish:	Kore-EX5 LED Module: Exterior rated, brushed, two-step electrolytic color anodizing. Anodized Black (BLK) or Anodized Aluminum (AL). Envelope: Clear/Frosted, Clear Rain Bubble Pattern, Amber Rain Bubble Pattern.
Power Supply Enclosure:	Refer to Exton Power Supply IP20 Specs sheet , IP24 Specs sheet or IP66 Specs sheet for details.
Mounting:	4" Monopoint - Kore-EX5 LED Module mounts to a standard 4" J-Box (for exterior installations). Refer to page 2 for complete catalog ordering combinations.
LED:	High Wattage Array Cree LED, 2-Step Macadam. 5W @ 500 Lumen Output with 2700K 82-85 CRI typical. All values are initial lumens. For exact lumen output and wattage consumption data, please consult LM79 reports. Online power consumption does not include driver losses. Contact factory for 2400K, 3500K, 4000K or 90 CRI.
Optics:	A 15° reflector is supplied in all S Envelope options to maximize decorative element illumination.
Electrical:	24VDC. Total input watts per EX-5 Module: 6.5W. 250W max. per circuit.
Remote Power Supply:	The Exton System is designed for use with a Remote Power Supply Enclosure and Driver. Refer to Exton Power Supply IP20 Specs sheet , IP24 Specs sheet or IP66 Specs sheet for details. Use of Tegan Lighting Power Enclosures and Drivers only. If supplied "by others" the warranty and listing are void.
Envelopes:	"S" (Sign) Glass Envelope Clear (SEC), "S" (Sign) Glass Envelope Frosted (SEF), "S" (Sign) Glass Envelope Clear Rain Bubble Pattern (SECRP), "S" (Sign) Glass Envelope Amber Rain Bubble Pattern (SEARP). Contact factory for alternative stock or custom colors (over 100 units).
Accessories:	22K Color Correction Filter (CCT-22K), 24K Color Correction Filter (CCT-24K), Honeycomb Louver 16 - Black (HCLB - 16). Note: CCT22/24 = Kelvin Temperature results when used with the standard 27K Cree LED.
Installation:	Refer to Installation Instructions for details. For system layout, and specification assistance, refer to the Exton Application Guide for details.
Labels:	ETL Listed; Tested to UL 2108 Low Voltage Lighting Systems. In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on teganlighting.com are the most recent version and supersede all other versions that exist in any other printed or electronic form. Kore-EX5 Module, Monopoint Mounting - 3 year warranty. Envelopes: limited three year warranty . Refer to Exton Application Guide for details.



Kore-EX5 - Glass Envelopes - Sign (S) Types

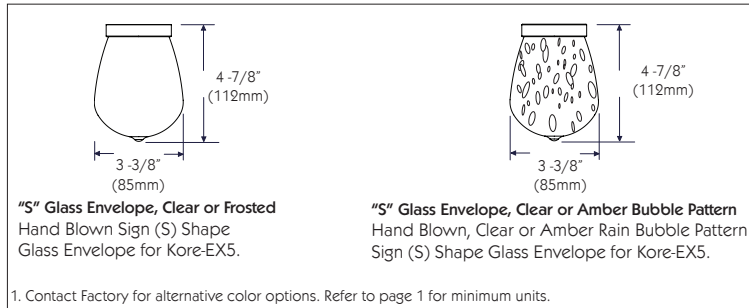

Exton - Monopoint - Kore-EX5 24VDC Direct Mount Module with "S" Envelope - Combinations



Kore-EX5 LED, Monopoint, Direct Mount
Module, S Envelope Clear.
Aluminum or Black finish.

Kore-EX5 LED, Monopoint, Direct Mount
S Envelope Frosted,
Aluminum or Black finish.

(EX5-K-MP-SEC-AL)
(EX5-K-MP-SEC-BLK)

(EX5-K-MP-SEF-AL)
(EX5-K-MP-SEF-BLK)



Kore-EX5 LED, Monopoint, Direct Mount
S Envelope Clear Rain Bubble Pattern,
Aluminum or Black finish.

Kore-EX5 LED, Monopoint, S Envelope
Amber Rain Bubble Pattern,
Aluminum or Black finish.

(EX5-K-MP-SECRP-AL)
(EX5-K-MP-SECRP-BLK)

(EX5-K-MP-SEARP-AL)
(EX5-K-MP-SEARP-BLK)

1. Order Power Supplies separately. Refer to [Exton Power Supply IP20 Specs sheet](#), [IP24 Specs sheet](#) or [IP66 Specs sheet](#) for options.
2. Order Accessories on p. 1 separately.



Click on the linked image below to visit the [Exton Gallery](#).



Kore-EX5 LED Monopoint, Black,
S Envelope Frosted



Kore-EX5 LED Monopoint, Black,
S Envelope Amber Rain Pattern

Tegan's [Exton Application Guide](#) features installation examples with complete BOM! Click on the linked image below.

