


Exton Monopoint System

NEW

Kore EX5 IP65
Rigid Stem 4" Monopoint Pendant
Downlight




Category:	Exton 24" Rigid Stem Monopoint with Downlight. Remote Power Supply Enclosure with Driver. Optional 0-10V Dimming.
Material:	Monopoint/Stem: Powdercoated Stainless Steel. Kore EX5 LED Module: UV stable exterior anodized aluminum, UV stable polycarbonate, rubber O-rings.
Finish:	Kore EX5 LED Module: Exterior rated, brushed, two-step electrolytic color anodizing. Anodized Black (BLK) or Anodized Aluminum (AL). 24" (max) Rigid Stem: Field cuttable, finish to match Module.
Power Supply Enclosure:	Refer to Exton Power Supply IP20 Specs sheet , IP24 Specs sheet or IP66 Specs sheet for details.
Kore-EX5 LED:	5W Kore EX5 LED Pendant - Anodized Aluminum or Anodized Black finish.
Accessories:	Exton Sandblasted Lens (EX5-SBL), Exton Solite Lens (EX5-SOL), Exton 22K Color Correction Filter (EX5-CCT-22K), 24K Color Correction Filter (EX5-CCT-24K), Exton Honeycomb Louver 16 - Black (EX-HCL-BLK), EX5 Snoot, Black finish (EX5-SNT-BLK). Note: CCT22/24 = Kelvin Temperature results when used with the standard 27K Cree LED.
LED:	High Wattage Array Cree LED, 2-Step Macadam. 5W @ 500 Lumen Output with 2700K 82-85 CRI typical. All values are initial lumens. For exact lumen output and wattage consumption data, please consult IES reports. Online power consumption does not include driver losses. Contact factory for 3000K, 3500K, 4000K or 90 CRI.
Electrical:	24VDC. Total input watts: 6.5W. 300W max. per circuit.
Optics:	15° 25° 35° Reflector for Kore EX5 Downlight Pendant. Refer to photometric report for details.
Remote Power Supply:	The Exton System is designed for use with a Remote Power Supply Enclosure and Driver. Refer to Exton Power Supply IP20 Specs sheet , IP24 Specs sheet or IP66 Specs sheet for details. <u>Use of Tegan Lighting Power Enclosures and Drivers only.</u> If supplied "by others" the warranty and listing are void.
Installation:	Kore EX5 LED Pendant mounts to a 4" metal IP65 J-Box by others rated between 50-150lbs fixture support securely mounted to building structure. Refer to installation instruction drawings for secure mounting examples. Refer to Installation Instructions #24 for details. For system layout, and specification assistance, refer to the Exton IP65 Application Guide for details.
Labels:	ETL Listed; Tested to UL 2108 Low Voltage Lighting Systems. In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on teganlighting.com are the most recent version and supersede all other versions that exist in any other printed or electronic form. Kore EX5 Module, Monopoint Mounting - 3 year warranty.



Exton Monopoint System

Exton - Rigid Stem Monopoint - 24VDC Kore EX5 Downlight Pendant

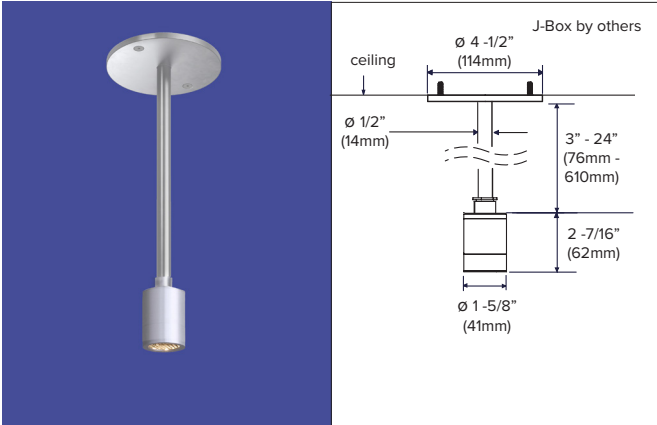


Kore EX5 Stem Pendant Monopoint with Downlight, Remote Power Supply, shorter rigid pendant length shown. 24" Field-cutable rigid stem, 3" length minimum.

Kore EX5: Aluminum or Black finish.

(EX5-K-P24-4MP-RGS-DL-15, 25 or 35-AL)
(EX5-K-P24-4MP-RGS-DL-15, 25 or 35-BLK)


1. Specify 15°, 25°, or 35° beam spread.
2. Order Remote Power Supplies separately. Refer to [Exton Power Supply IP20 Specs sheet](#), [IP24 Specs sheet](#) or [IP66 Specs sheet](#) for options.
3. Order Accessories separately.
4. 24VDC Operation.

Exton - 4" Rigid Stem Monopoint - Kore EX5 Downlight Pendant - Accessories

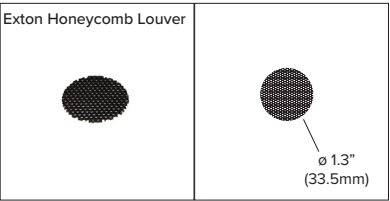


Exton Honeycomb Louver, Black
(EX5-HCL-BLK)

1/8" Hexcell black metal. Controls spill illumination and glare.

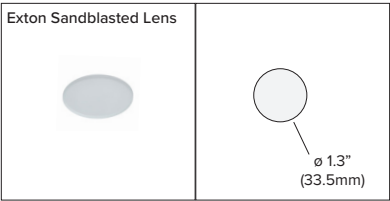


Exton Sandblasted Lens
(EX5-SBL)

Creates an uniform beam pattern that is useful for wall washing. Tempered glass.

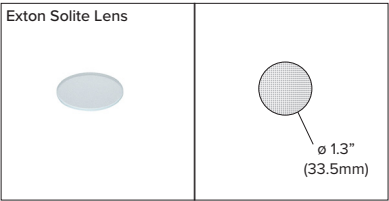


Exton Solite Lens
(EX5-SOL)

Tempered glass with a stipple effect that provides obscurity while retaining high transmission values. This low-iron optically clear glass offers maximum transmission and minimal absorption.

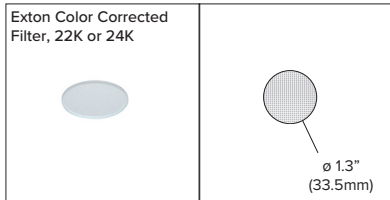

Exton Color Corrected Filter, 22K or 24K
(EX5-CCT-22K/24K)

22K or 24K Kelvin Temperature results when used with the standard 27K Cree LED.

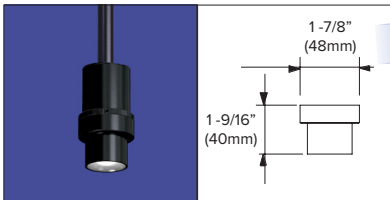

Exton Snoot
(EX5-SNT-BLK)

Exton Snoot accessory for additional glare control. Black Finish. Installed with the standard Media Holder that accommodates two Media.



Click on the linked images below to visit the [Exton IP65 Gallery](#).



Kore EX5 LED Rigid Stem Monopoint
Downlight Pendant, Black, Remote Power
Supply

Click on the image below to visit the [Exton IP65 Application Guide](#).

