





## CATALOG NUMBER LOGIC

MPRTL - RP - AL - SpotExt72 - AL



## Recessed Trimless Monopoint

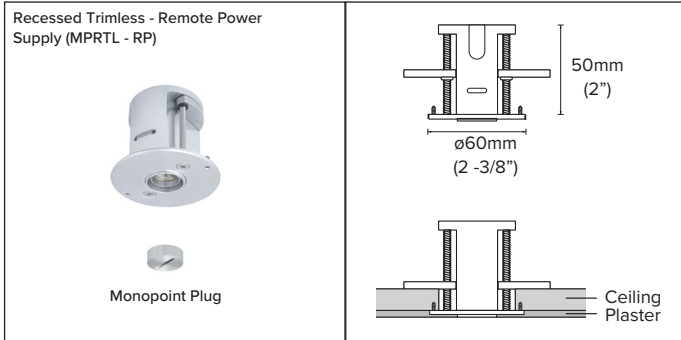

**Example:** Shown as installed with a Claro Spotlight, not included with Monopoint. Specify desired Spotlight and Remote Power Supply separately for a complete system.


### Recessed Trimless Monopoint, Aluminum, Black, White, Bronze or Satin Brass Finish

#### Catalog Number

MPRTL-RP-AL, BLK, WH, BRZ, or BBR

**For use with Remote Power Supply(s)** - See page 3 for links to order Power Supply(s) and Spots; ordered separately. Ships with Monopoint Plug. Note: Only the Plug has a finish. The Monopoint body is unfinished and hidden when installed. Contact Factory for special order Polished Brass (PBR) finish (Minimum 25).

## Recessed Trimless Monopoint - Accessories

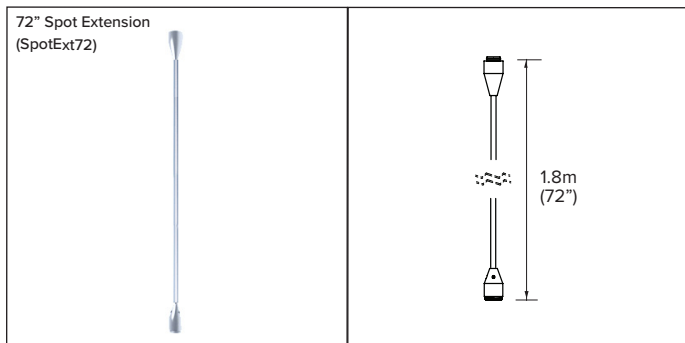


### 72" Spot Stem Extension, Aluminum, Black or White Finish

#### Catalog Number

SpotExt72-AL, BLK or WH

Spot Stem Extension for use with Centro Trac Systems and Monopoints. Attaches to the Spot for an extension up to 72". Spot Extensions can be shortened in the field or at the factory for an additional cost. Note: A Sloped Ceiling Adapter must be added for use in Sloped Ceilings with Monopoints. Contact factory for special order Brushed Brass, Bronze or Polished Brass finish. Minimum quantity may apply.

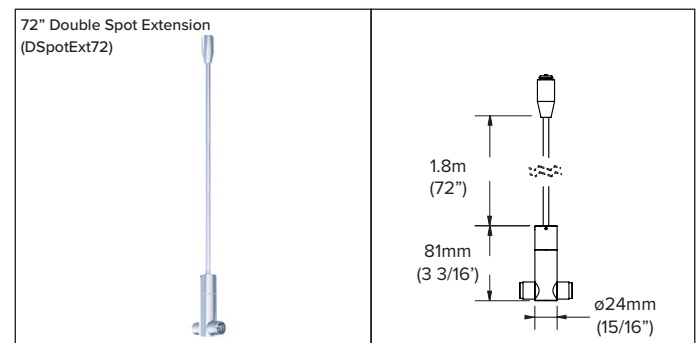

### 72" Double Spot Extension, Aluminum or Black Finish


#### Catalog Number

DSpotExt72-AL, BLK or WH

Double Spot Extension for mounting two spotlights. Attaches to the Spot with an extension up to 72". The Double Spot Extension can be shortened in the field or at the factory for an additional cost. Note: Due to the weight of the Spots, the Double Spot Extension cannot be used for sloped ceiling applications with Monopoints; contact factory for special order options. Contact factory for White, Brushed Brass, Bronze or Polished Brass finish. Minimum quantity may apply. Refer to [Installation Instructions](#) for details.



## Recessed Trimless Monopoint - Accessories

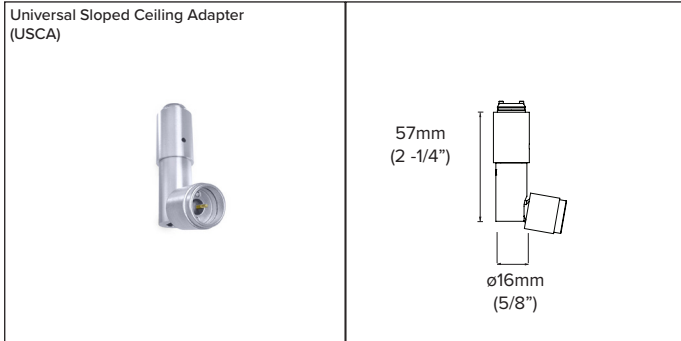

### Universal Sloped Ceiling Adapter, Aluminum, Black or White Finish

**Catalog Number**

USCA-AL, BLK or WH

The Universal Sloped Ceiling Adapter allows for angle adjustment of any Spotlight when connected to a Monopoint installed on a sloped ceiling. Tilts 90° and rotates 350°. Brushed Aluminum (AL), Black (BLK) or White (WH) finish. Contact factory for special order Bronze Brushed Brass or Polished Brass finish. Minimum quantity may apply.



**Category:** The Recessed Trimless Monopoint features the cleanest, most minimal installation of all Monopoints, allowing for plastering right to the edge of the connection point. Specify desired Spotlight separately. Compatible with LED MR-16 12VAC Triac DM or dedicated LED 24VDC 0-10V DM Spot and Remote Power Supply; ordered separately.

**Material:** Extruded and machined aluminum.

**Finish:** Brushed Aluminum (AL), Black (BLK), White (WH), Oil-Rubbed Bronze (BRZ) or Brushed Brass (BBR). Contact factory for special order Polished Brass (minimum of 25). Note: Only the Plug has a finish, the Monopoint body will be hidden once installed.

**Monopoint:** Recessed Trimless Monopoint (MPRTL-RP-XX).

**Accessories:** 72" Spot Extension (SpotExt72), 72" Double Spot Extension (DSpotExt72), Universal Sloped Ceiling Adapter (USCA). Refer to pages 1 and 2 for finish options.

**Source/**

**Spot:** Ordered separately. 24VDC Dedicated LED, Halogen or LED 12VAC MR-16. Refer to linked Spotlight on pages 4-5 for details. In-rush may be a factor with other manufacturers LED MR-16 lamps; refer to lamp manufacturers' spec sheets to determine the correct power supply wattage required for the number of lamps specified..

**Remote Power**

**Supply:** Ordered separately. Refer to [24VDC Driver Specs sheet](#), [12VAC Electronic Transformer Specs sheet](#) or [12VAC Magnetic Transformer Specs sheet](#) for Power Supply options. NOTE: For dimming LED MR-16 lamps (Soraa) with electronic/magnetic transformers, please refer our [MR-16 LED Specs sheet](#) for technical details. In-rush may be a factor with other manufacturers LED MR-16 lamps; refer to their spec sheets.

**Installation:** Monopoints are not designed with internal isolation for metal ceiling installation. Contact factory for isolation gaskets. Refer to [Installation Instructions](#) for details. For system layout, and specification assistance, refer to the [Trac Design Guide](#) under the Gallery link. Non-IC rated.

**Labels:** ETL & CE Listed; Tested to UL 1574 - Issue: 2004/09/07 Ed: 3 Rev:2012/01/25 UL Standard for Safety Track Lighting Systems. IP20. Interior use only. In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on [teganlighting.com](#) are the most recent version and supersede all other versions that exist in any other printed or electronic form. 3 Year Warranty.



# Monopoint Systems

IP20 Trimless Monopoint  
LED MR-16 12VAC Triac DM  
Dedicated LED 24VDC 0-10V DM

## Recessed Trimless Monopoint - 12VAC Spotlights




Arlo - Short Glare Shield



Arlo - Long Glare Shield



Arlo - Angled Glare Shield

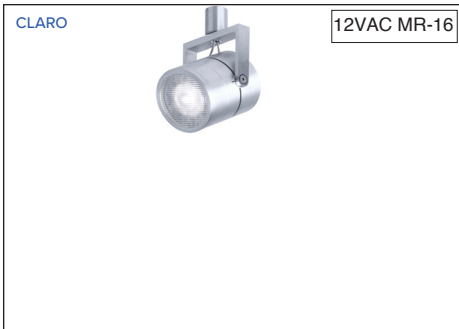


Claro



Argent



Arte-MR-16

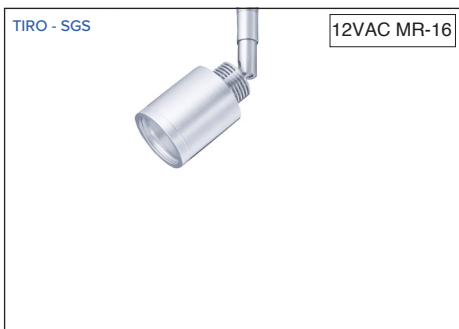

Tiro - Short Glare Shield



Tiro - Frit Glass Shield



Arte - AR-111

## Recessed Trimless Monopoint - 24VDC Spotlights



Pico - 1



Oculus - Short Glare Shield



# Monopoint Systems

IP20 Trimless Monopoint  
LED MR-16 12VAC Triac DM  
Dedicated LED 24VDC 0-10V DM

## Recessed Trimless Monopoint - 24VDC Spotlights

