


**1. CAUTION: Read all instructions.**

- Do not install any Spotlight closer than six inches from any curtain or similar combustible material.
- Do not install this system in a damp or wet location.
- Turn off electrical power before modifying the lighting system in any way.
- Ensure the Spotlight connector is attached correctly to the system with no cross threading and is tightened down completely to make contact with the top of the track.
- Ensure all connections are tight. Loose connections can cause overheating, arcing and a potential fire risk.
- Always use appropriate lamps and ensure they are fitted securely.
- Use only as described in these Tegan Lighting Installation Instructions.
- Use only Tegan Lighting supplied accessories.
- Luminaires may be extremely hot, allow to cool before touching.
- These are 12VAC Spotlights; they must be connected to an appropriate 12VAC power supply. Refer to Specification Sheets.
- For proper installation, have a qualified electrician install this product.
- This luminaire must be wired and grounded in accordance standard accepted electrical installation practices, local codes, and ordinances.
- Wire supply connections must be made with U.L. or comparable testing agency-approved connectors.
- Regular cleaning of these products is important. Switch off at main supply and allow to cool before touching. Clean fittings with a soft damp cloth and allow to dry before reconnecting power supply.




Arte-AR111 Spot  
on Centro Trac  
with Tegan Media Holder

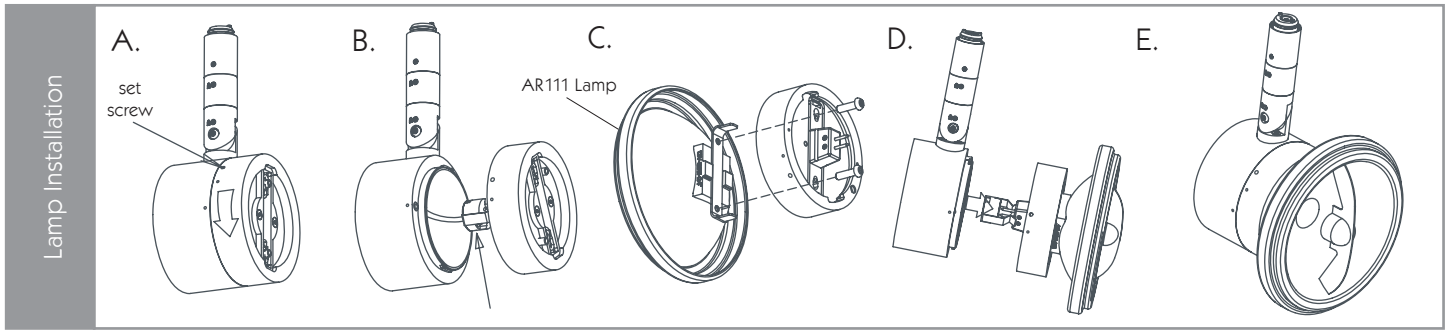


### 1. Installing/Changing the AR111 Lamp

- Loosen set screw; twist off.
- Remove adapter ring from internal socket by pulling gently.
- Remove any existing screws from shipped lamp; insert and tighten Tegan-supplied supplied screws behind adapter ring into the threaded holes of the AR111 lamp.
- Reconnect internal socket into rear of adapter ring.
- Lock adapter ring and lamp onto body and rotate until it stops. Tighten set screw.

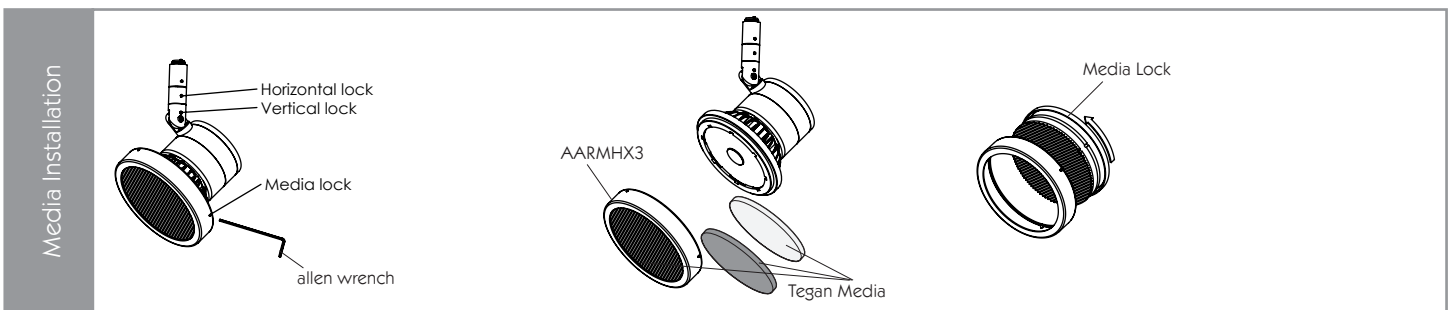

### 2. Installing Accessories for Arte-AR111

- Use the supplied allen wrench to loosen the Media lock, remove front ring to insert one media. Replace front ring to secure.
- For up to 3 Media, replace front ring with the Arte-AR-111 Media Holder 3 (AARMHX3) containing up to 3 Tegan Media.
- Use Media Lock to attach media holder directly against lamp. Internal ring unscrews to change media. Tighten until snug, overtightening can cause damage.
- Soraa's Snap-On Media can be used with Tegan's Media Holder installed. Snap-On Media attach magnetically, directly to the lamp.

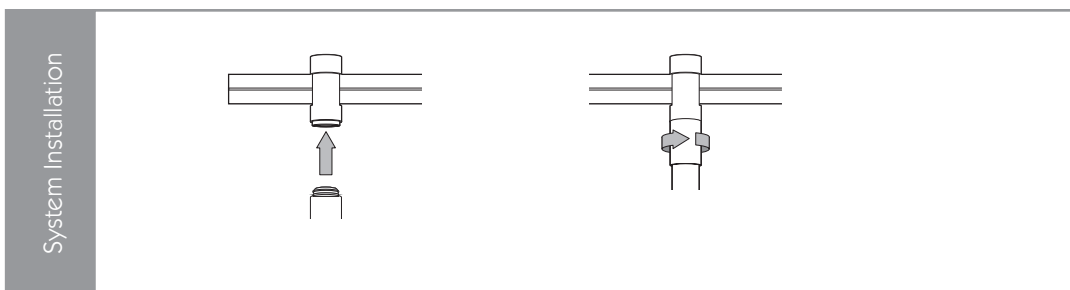

### 3. Installing the Spotlight with Centro Trac, Retrac or Duplex Cable Connector

- Insert Centro Trac, Retrac, or Duplex Cable Connector into Trac System, ensuring locking screws are aligned (Centro Trac shown in diagram; refer to specific System Installation Sheets for details). No connector is required for Monopoints.
- Rotate connector collar until spotlight is securely fastened.
- The Spotlight connects to the Connector with the Twist & Click mechanism. The Spotlight "clicks" into the the jack plug socket, then twists into position to lock the connection in place.

**NOTE:** Do not exceed maximum number of Spotlights per driver wattage rating, doing so will damage system.